




RBCU264

Precision's durable all stainless steel bakery counters have been designed to provide bakers with reliable, energy and cost efficient refrigerated storage solutions.

Proudly made in the UK, these 600 x 400 patisserie tray format counters are capable of meeting the highest demands of commercial bakeries and patisseries all around the world.

Key Features:


- Stainless Steel Interior & Exterior
- Front Breathing & Venting Refrigeration System
- Designed To Operate In 43°C Ambient
- Anti-Drip Worktop
- Built-In Air Duct For Even Temperature Distribution
- R290 Refrigerant
- Zero ODP Injected Polyurethane Insulation - 60mm
- 5/ +5°C Retarder Temperature Range
- Electronic Controller With Easy Read LCD Screen
- Hot Gas Defrost
- Door Locks Fitted As Standard
- Rifle Bore Coated Evaporators
- Integrated Flush Door Handle
- 600 x 400 Shelving System - Anti Tilt Slides
- Hi / Lo Audio Visual Temperature Alarms
- Condensing Unit Safety System To Protect Compressor From Blocked Condensers
- Self Closing Doors
- Heavy Duty Brake & Swivel Castors
- Waste Heat Recovery Condensate Vaporiser System

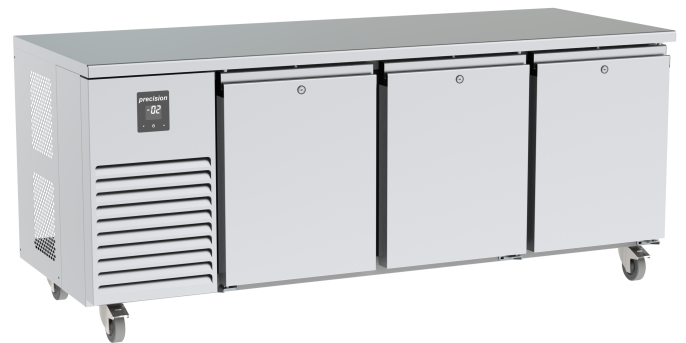

RBCU364

Options:

- Stainless Steel Back & Unit Housing
- Precision Connect

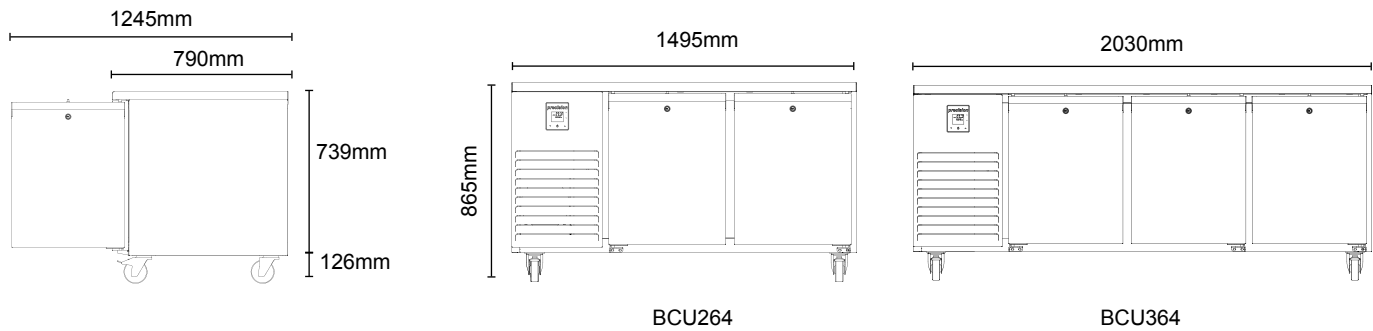

Model	RBCU264	RBCU364
Type	Retarder	Retarder
Material	ST/ST Int/Ext	ST/ST Int/Ext
Tray Size	600 x 400	600 x 400
Pairs of Tray Slides Supplied	10	15
Max Number of Trays (50mm Spacing)	20	30
Temperature Range	-5 / +5°C	-5 / +5°C
Exterior WxDxH (mm)	1495x790x865	2030x790x865
Net Usable Volume (litres)	208	312
Weight (KG)	115	145
Refrigerant / GWP	R290 / 3	R290 / 3
Refrigeration Watts (+45°C Condensing)	304	304
Evaporating Temp	-15°C	-15°C
Heat Rejection Watts*	608	608
Noise Output (dBa)	75	78
Power	230 / 50 / 1	230 / 50 / 1
Running Amps	2	2
Total Electrical Load - kW	0.46	0.46
Energy Consumption / 24hrs - kWh**	N/A	N/A
Energy Consumption / Year (AEC) - kWh**	N/A	N/A
Energy Efficiency Class**	N/A	N/A

* Heat Rejection is taken at the listed evaporating and condensing condition. Watts is calculated by taking the total power of the cabinet.

** Tested to BS EN ISO 22041

We are constantly innovating and improving our products. Please always check our website for the most up-to-date version of this spec sheet