

HSS340 Prep

Proudly made in the UK, Precision's Space Saver Prep Counter is perfect for smaller operations or where space is at a premium. This compact all stainless steel prep counter offers high performance cold prep and storage solutions in even the smallest of kitchens.

An insulated hinged lid is supplied as standard to reduce energy consumption and maintain safe food temperatures for longer periods.

Key Features:

Stainless Steel Interior & Exterior

Front Breathing & Venting 32°C Ambient Rated Refrigeration System

Pan Well Holds 6 x GN1/3 - 150mm Deep pans

Insulated Lid

R290 Refrigerant

Zero ODP Injected Polyurethane Insulation - 60mm

+1 / 4°C Refrigerator Temperature Range

Electronic Controller With Easy Read LCD Screen

Hot Gas Defrost

Door / Drawer Locks Fitted As Standard

Rifle Bore Coated Evaporators

Integrated Flush Door Handle

Stainless Steel Perforated Shelves - Anti Tilt Slides

Hi / Lo Audio Visual Temperature Alarms

Condensing Unit Safety System To Protect Compressor From Blocked Condensers

Self Closing Doors

Adjustable Levelling Feet At Front

72mm Castors

Waste Heat Recovery Condensate Vaporiser System



Options:

Bank of 2 Drawers (150/150mm Depth)


Stainless Steel Back

Extra Std Stainless Steel Perforated Shelves / Slides

GN 1/3 Pan Set

Precision Connect



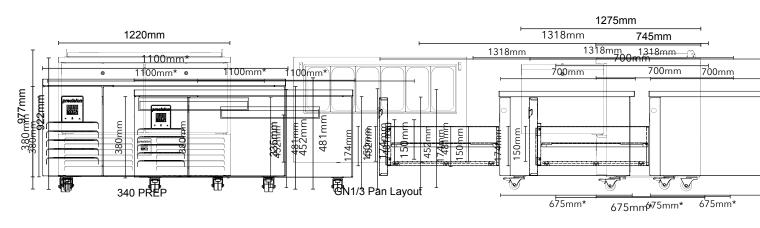

N *1 - 1					1100	.040 D			
Model		,	VUBC12						
Type	lype 'ype	111010 00	,. Multi-Use	iviuiti-Use' '		mgalary f Tested	r restec	ı as kernge rigerator	ratorefrige
Type Material	Matarial			ST/ST Int/Fvt			40	.go.a.o.	
Material		S	ST/ST Int/E	xt					
Drawer Size	r		GN2/1						
	[[] Maximum Pan Depth			150mm					
Maximum Pan	Depth		150mm						
Maxinerature R	of Shiple Range		N/A	-22 / 4°C				-2 / 4°C	
Temperature R			-22 / 4°C			-	-2 / 4°C		
Net Usable Vol	HNAT Haable Volume (litres)		0* x 675* >	× 380 ⁵³					
Net Usable Vo		70	53		70				
	Refrigerant / GWP			R290/3					
Weight (KG) G	Watts, (+45°C, C. Redigings nation Watts (+45°C, Condensing	a) 208	70	200	208491	KZ9U / 3)		491
Refrigerant / C	SWP	-17	R290/3	^^^				404	-
Rofrigoration.	Lvaporauny remp Matts:(+45°C (Coadansina), Wotto	312	208	00 C	31.436		491		/36
Evaporating 9e	Matts (+45°C Non kensing) h Watts West Rejection Watts	012		312	31236	-10°C		736	, 30
Evaporating Te	emp		-30°C				-10°C		
HAR POWER SIRCHIPM	Watts Power	∠3U / 5U /	/ 1 312	230 / 50 / 1	Z3U / 5U / I	62	736		
Noise Output	(dBa)		75				75		
	mption / Z4nrs-nevgn Consumption / Z4nrs - kvvn^	∠.4	230 / 50 /	1 2.4	۷.4 ۱			1	ı
Power F Engrav Consur	Energy Consumption / 24hrs - kWh**		2307307	1 2.4	275			'	371
Running Amps	8		1.7						
Energy Consult * 25mm Ventilation	mEnergy Efficiency Kylasa**		2.4	B			1	Α	
Energy Consu	mption / Year (AEC) - kWh**		875				364		
** Variable Temperature Units are Tested to EN16825 Climate Test Class 4 - L1 Classification Test for Freezers Energy/Efficiency-Class*** Supplementary data provided if tested to EN16825 Climate TBst Class 4 - M1 Classification Test for Pofrick retors for info columns to the Class of the									
* 25mm Ventilation Gap Required On Left & Rear Of Unit For Built-in Applications									الاد ۱۰۰۰
TI LESTED TO BO FIN 1907 STATE AND A STATE									et
We/are boostantheinnowating and impseed to post still leasted ways care un consumbility of the foostrupted date version of this spec sheet									

Supplementary data provided if tested to EN16825 Climate Test Class 4 - M1 Classification Test for Refrigerators for info only

We are constantly innovating and improving our products. Please always check our website for the most up-to-date version of this spec sheet