



SS300

SS150

**Key Features:**

- Stainless Steel Interior & Exterior
- Designed To Operate In 43°C Ambient
- Front Breathing & Venting Refrigeration System
- GN 1/1 Shelving System
- R290 Hydrocarbon Refrigerant
- Zero ODP Injected Polyurethane Insulation - 40mm
- +1 / 4°C Refrigerator Temperature Range
- Electronic Controller With Easy Read LCD Screen
- Hot Gas Defrost
- Door Locks Fitted As Standard
- Rifle Bore Coated Evaporators
- Integrated Flush Door Handle
- Gastronorm Shelving System - Anti Tilt Slides
- Hi / Lo Audio Visual Temperature Alarms
- Condensing Unit Safety System To Protect Compressor From Blocked Condensers
- Self Closing Doors
- Adjustable Levelling Feet At Front
- Rollers At Rear For Easy Positioning
- Waste Heat Recovery Condensate Vaporiser System

Proudly made in the UK, Precision's versatile all stainless steel space savers are perfect for space optimisation in commercial kitchens all around the world. This range of space saver counters and under counters offer high performance storage solutions in even the smallest of kitchens.


For example, our HSS 300 offers the same internal storage capacity as a traditional two door GN1/1 counter but with a 28% smaller footprint.



UC150

**Options:**

- Bank of 2 Drawers (150mm Depth, H only)
- Bank of 2 Wide Drawers (150mm Depth, H only) - SS300
- Countertop Pan Well - HSS300 - 4 x GN1/3 (150mm)
- Insulated Hinged Lid For Countertop Pan Well
- Castors - Increases Height by 62mm
- Stainless Steel Back
- Extra Std Nylon Coated Shelves / Slides - GN1/1
- Stainless Steel Shelves / Slides - GN1/1
- Left Hand Hinged Door (UC150 & SS150)
- Precision Connect

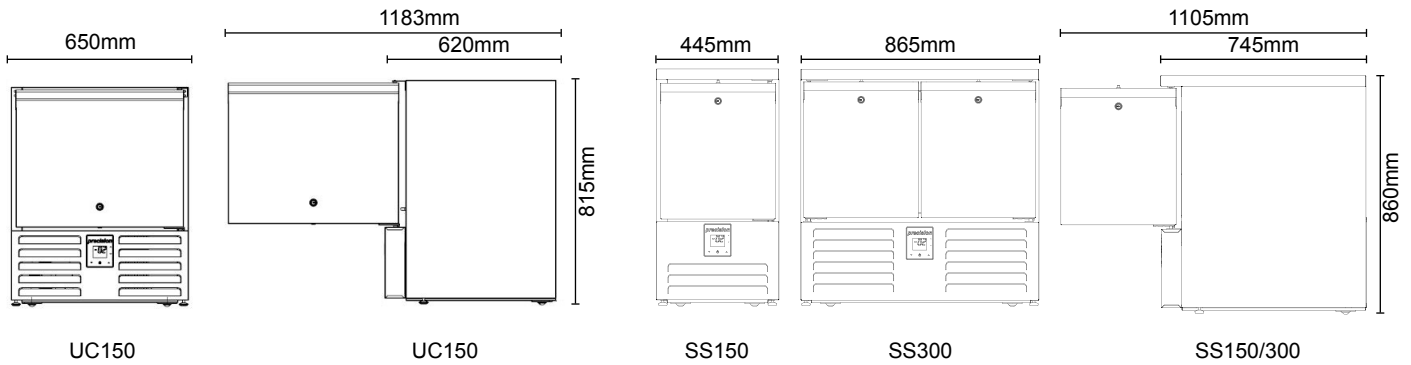

Model	HUC150	LUC150	HSS150	LSS150	HSS300	LSS300
Type	Refrigerator	Freezer	Refrigerator	Freezer	Refrigerator	Freezer
Material	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext
Shelf Size	GN1/1	GN1/1	GN1/1	GN1/1	GN1/1	GN1/1
Number of Shelves	2	2	2	2	4	4
Max Number of Shelves (100mm Spacing)	4	4	4	4	8	8
Temperature Range	+1 / 4°C	-18 / -22°C	+1 / 4°C	-18 / -22°C	+1 / 4°C	-18 / -22°C
Exterior WxDxH (mm)	650x620x815	650x620x815	445x745x860	445x745x860	865x745x860	865x745x860
Net Usable Volume (litres)	62	62	48	48	96	96
Weight (KG)	65	70	65	70	80	85
Refrigerant / GWP	R290 /3	R290 /3	R290 /3	R290 /3	R290 /3	R290 /3
Refrigeration Watts (+45°C Condensing)	373	208	373	208	373	495
Evaporating Temp	-10°C	-30°C	-10°C	-30°C	-10°C	-30°C
Heat Rejection Watts*	601	410	563	401	605	921
Noise Output (dBa)	60	59	58	58	67	68
Power	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1
Running Amps	1.4	1.5	1.4	1.5	1.5	2.7
Total Electrical Load - kW	0.32	0.35	0.32	0.35	0.35	0.62
Energy Consumption / 24hrs - kWh**	1.06	5.48	0.77	4.41	1.31	4.66
Energy Consumption / Year (AEC) - kWh**	387	2000	281	1609	478	1701
Energy Efficiency Class**	A	D	A+	D	A	D

\* Heat Rejection is taken at the listed evaporating and condensing condition. Watts is calculated by taking the total power of the cabinet.

\*\* Tested to BS EN ISO 22041

We are constantly innovating and improving our products. Please always check our website for the most up-to-date version of this spec sheet