



PT1401

Key Features:

- Stainless Steel Interior & Exterior
- Designed To Operate In 43°C Ambient
- Built-In Air Rear Duct For Even Temperature Distribution
- R290 Hydrocarbon Refrigerant
- Zero ODP Injected Polyurethane Insulation - 90mm
- 2 / +4°C Refrigerator Temperature Range
- Electronic Controller With Easy Read LCD Screen
- Hot Gas Defrost
- Door Locks Fitted As Standard
- Rifle Bore Coated Evaporators
- Ergonomic Flush Door Handle
- Gastronorm Shelving System - Anti Tilt Slides
- Hi / Lo Audio Visual Temperature Alarms
- Condensing Unit Safety System To Protect Compressor From Blocked Condensers
- Self Closing Doors
- Heavy Duty Brake & Swivel Castors
- Waste Heat Recovery Condensate Vaporiser System


Precision's durable all stainless steel top mount cabinets have been designed to provide commercial caterers with reliable, energy and cost efficient refrigerated storage solutions. Proudly made in the UK, these GN2/1 cabinets are capable of meeting the highest demands of commercial kitchens all around the world.



PT601

Options:

- Extra Std Nylon Coated Shelves / Slides - GN2/1
- Stainless Steel Shelves / Slides - GN2/1
- Extra Shelf / Pan Slides
- 600 x 400 Bakery Racking - 20 Pairs Of Slides / Door
- Fish Shelving - 8 x GN2/1 - 100mm Deep - Stainless Steel Pans & Slides per section with Slime Trays
- Stainless Steel Back
- Left Hand Hinged Door
- Adjustable Legs
- Remote - Excludes Condensing Unit But Includes Expansion and Solenoid Valve (Fitted)
- Precision Connect

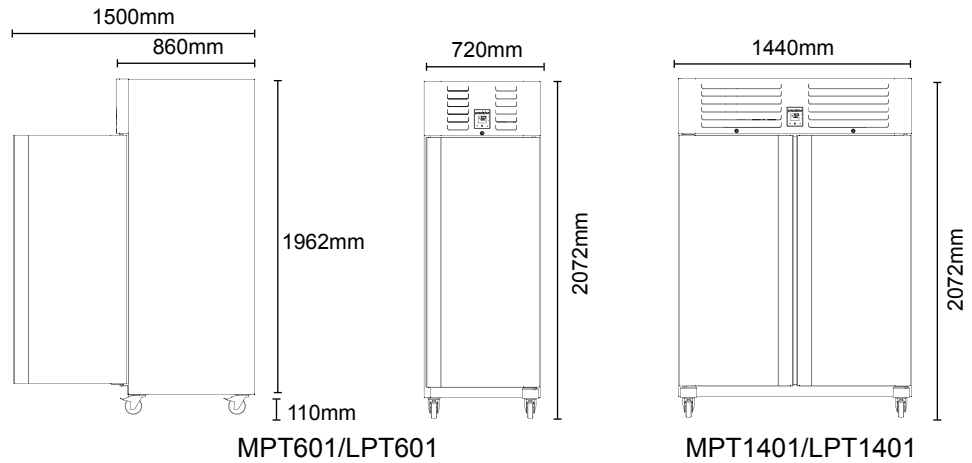

Model	MPT601	LPT601	MPT1401	LPT1401
Type	Refrigerator	Freezer	Refrigerator	Freezer
Material	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext
Shelf Size	GN2/1	GN2/1	GN2/1	GN2/1
Number of Shelves	4	4	8	8
Max Number of Shelves (100mm Spacing)	14	14	28	28
Temperature Range	-2 / +4°C	-18 / -22°C	-2 / +4°C	-18 / -22°C
Exterior WxDxH (mm)	720x860x2072	720x860x2072	1440x860x2072	1440x860x2072
Net Usable Volume (litres)	460	460	933	933
Weight (KG)	138	146	210	230
Refrigerant / GWP	R290 / 3	R290 / 3	R290 / 3	R290 / 3
Refrigeration Watts (+45°C Condensing)	373	503	964	735
Evaporating Temp	-10°C	-30°C	-10°C	-30°C
Heat Rejection Watts*	569	892	1446	1102
Noise Output (dBa)	66	69	62	65
Power	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1
Running Amps	1.3	2.7	4	3.1
Total Electrical Load - kW	0.30	0.62	0.92	0.71
Energy Consumption / 24hrs - kWh**	1.22	5	2.89	9.88
Energy Consumption / Year (AEC) - kWh**	445	1825	1055	3606
Energy Efficiency Class**	B	C	C	D

* Heat Rejection is taken at the listed evaporating and condensing condition. Watts is calculated by taking the total power of the cabinet.

** Tested to BS EN ISO 22041

We are constantly innovating and improving our products. Please always check our website for the most up-to-date version of this spec sheet