



**TRUE REFRIGERATION  
INTERNATIONAL**

UK Tel +44 (0) 1709 888 080 • Germany Tel +49 (0) 7622 6883 0  
Australia Tel +61 2 9618 9999 • www.truemfg.com



4/21

Model:  
**TSD-09G-HC-LD**

**TSD Series:**



*Reach-In Glass Slide Door Refrigerator with Hydrocarbon Refrigerant & LED Lighting*



## TSD-09G-HC-LD

- ▶ True's glass door reach-ins are designed with enduring quality that protects your long term investment.
- ▶ Designed using the highest quality materials and components to provide the user with colder product temperatures, lower utility costs, exceptional food safety and the best value in today's food service marketplace.
- ▶ Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydro carbon refrigerant that has zero (0) ozone depletion potential (ODP), & three (3) global warming potential (GWP).
- ▶ Energy efficient, factory balanced, refrigeration system holds 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- ▶ Exterior - high quality stainless steel front, sides, back, and top.
- ▶ Interior - attractive, NSF approved, white aluminum interior liner with stainless steel floor.
- ▶ Self closing doors. Counter-balanced weight system for smooth, even, positive closing.
- ▶ "Low-E", double pane thermal insulated glass door assemblies. The latest in energy efficient technology.
- ▶ LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
- ▶ Entire cabinet structure is foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

### PLAN VIEW

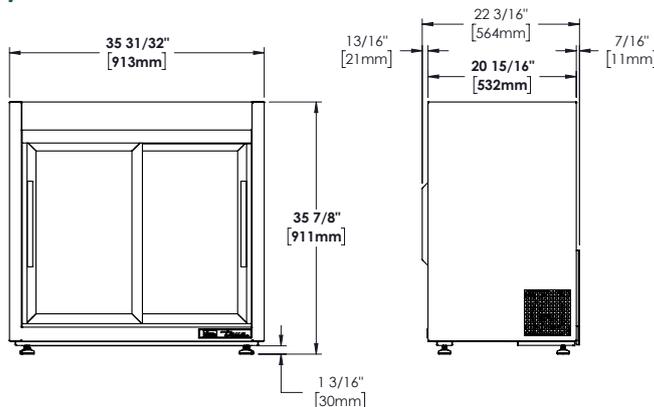

### ROUGH-IN DATA

Voltage: 220-240V/50Hz

Specifications subject to change without notice. Chart dimensions rounded up to the next whole millimeter (inches rounded up to the next 1/8").

| Model         | Doors | Shelves | Cabinet Dimensions (mm) |     |     | Total Display Area (m <sup>2</sup> ) | EEC | EEI  | Temperature Class | Annual Energy Consumption (kWh) | Crated Weight (kg) |
|---------------|-------|---------|-------------------------|-----|-----|--------------------------------------|-----|------|-------------------|---------------------------------|--------------------|
|               |       |         | W                       | D†  | H   |                                      |     |      |                   |                                 |                    |
| TSD-09G-HC-LD | 2     | 3       | 913                     | 532 | 911 | 0.41                                 | B   | 12,5 | M2                | 641                             | 127                |

† Depth does not include 42 mm for door handle.

Test Standard: EN23953 - Climate Class 3 (25°C, 60% relative humidity).