UK Tel +44 (0) 1709 888 080 • Germany Tel +49 (0) 7622 6883 0 Australia Tel +61 2 9618 9999 • www.truemfg.com





Model:

GDM-49-HC~TSL01

Glass Door Merchandiser:

Swing Door Refrigerator with Hydrocarbon Refrigerant & LED Lighting

5/21




GDM-49-HC~TSL01

- Designed using the highest quality materials and components to provide the user with an attractive, point of purchase merchandiser that brilliantly displays frozen food, resulting in high impulse sales.
- Factory engineered system using environmentally friendly R290 hydro carbon refrigerant.
- High capacity, factory balanced, refrigeration system holds 0.5°C to 3.3°C for best food preservation in extreme conditions.
- Exterior non-peel or chip clear coated cold rolled steel; durable and permanent.
- Interior NSF approved, white aluminum interior liner with stainless steel floor.
- Self closing door. Positive seal, torsion type closure system.
- "Low-E", double pane thermal insulated glass door assembly with extruded aluminum frame. The latest in energy efficient technology.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
- Entire cabinet structure is foamed-inplace using a high density, environmentally friendly, polyurethane insulation.

Bottom mounted units feature:

- No stoop" lower shelf
- Easily accessible condenser coil for cleaning

PLAN VIFW

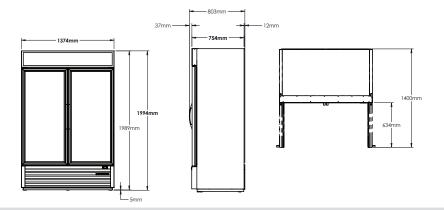

ROUGH-IN DATA

Voltage: 220-240V/50Hz

Specifications subject to change without notice. Chart dimensions rounded up to the next whole millimeter (inches rounded up to the next $\frac{1}{2}$ ").

10.00901 ==0 = 101/1											
			Cabir	et Dime (mm)	nsions	Total Dis- play Area			Tempera-	Annual Energy Consumption	Crated Weight
Model	Doors	Shelves	W	D†	Н	(m ²)	EEC	EEI	ture Class	(kWh)	(kg)
GDM-49-HC~TSL01	2	8	1375	759	1998	1,49	В	17,5	M1	1828	211

[†] Depth does not include 42 mm for door handle(s).