

Model:
T-23DF-HC

T-Series:
Reach-In Solid Swing Door Dual Freezer with Hydrocarbon Refrigerant




T-23DF-HC

- ▶ Designed using the highest quality materials and components to provide the user with colder product temperatures, lower utility costs, exceptional food safety and the best value in today's food service marketplace.
- ▶ Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydro carbon refrigerant that has zero (0) ozone depletion potential (ODP), & three (3) global warming potential (GWP).
- ▶ Freezer in top and bottom sections.
- ▶ High capacity, factory balanced refrigeration system that maintains -23.3°C temperatures. Ideal for both frozen foods and ice cream.
- ▶ Stainless steel solid doors and front. The very finest stainless with higher tensile strength for fewer dents and scratches.
- ▶ Door locks standard.
- ▶ Two (2) separate exterior digital temperature controls, one for each freezer section.
- ▶ Adjustable, heavy duty PVC coated grey shelves.
- ▶ Two (2) shelves and one (1) floor rack in each freezer section.
- ▶ Positive seal self-closing doors. Lifetime guaranteed door hinges and torsion type closure system.

Bottom mounted units feature:

- ▶ "No stoop" lower shelf.
- ▶ Storage on top of cabinet.
- ▶ Compressors perform in coolest, most grease free area of kitchen.
- ▶ Easily accessible condenser coil for cleaning.

PLAN VIEW

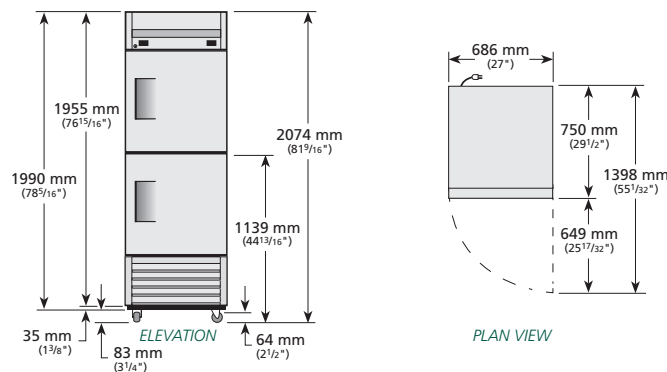

ROUGH-IN DATA

Voltage: 220-240V/50Hz

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the next 1/8").

Model	Model Type	Doors	Shelves	Cabinet Dimensions (mm)			Net Volume (litres)	EEC	EEI	24 hr/ Energy Consumption (kWh)	Annual Energy Consumption (kWh)	Crated Weight (kg)
				W	D	H						
T-23DF-HC	Vertical Frozen	2	4	686	750	2074	359	G	103.3	9.182	3351	148

Test Standard: EN16825 - Climate Class 5 (40°C, 40% relative humidity).