UK Tel +44 (0) 1709 888 080 • Germany Tel +49 (0) 7622 6883 0 Australia Tel +61 2 9618 9999 • www.truemfg.com





Model:

TSSU-48-18M-B-FGLID-HC

Food Prep Table:


Mega-Top Sandwich/Salad Unit with Flat Glass Lid and Hydrocarbon Refrigerant



TSSU-48-18M-B-FGLID-HC

- True's salad/sandwich units are designed with enduring quality that protects your long term investment.
- Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydro carbon refrigerant that has zero (0) ozone depletion potential (ODP), & three (3) global warming potential (GWP).
- Patented forced-air design holds 33°F to 41°F (.5°C to 5°C) product temperature in food pans and cabinet interior.
- Complies with and listed under ANSI/ NSF-7.
- All stainless steel front, top and ends. Corrosion resistant GalFan coated steel back
- Heavy-duty flat glass lid keeps pan temperatures colder and locks in freshness while enabling maximum product visibility.
- Interior attractive, NSF approved, clear coated aluminum liner. Stainless steel floor with coved corners.
- 6 ½ " (156 mm) deep, ½ " (13 mm) thick, full length removable cutting board included. Sanitary, high density, NSF approved white polyethylene provides tough preparation surface.
- Heavy duty PVC coated wire shelves.
- Foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

PLAN VIEW

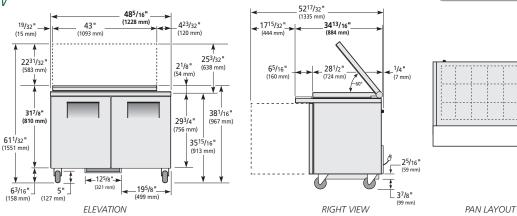

ROUGH-IN DATA

Voltage: 220-240V/50-60Hz

Specifications subject to change without notice. Chart dimensions rounded up to the next whole millimeter (inches rounded up to the next $\frac{1}{2}$ ").

Voltage: 220 2 10 1/30 00 12											
			Cabinet Dimensions (mm)						Capacity		Crated Weight
Model	Doors	Shelves	W†	D*	Н	HP	Voltage	Amps	(litres)	Refrigerant	(kg)
TSSU-48-18M-B-FGLID-HC	2	4	1229	884	967	1/3	230-240/50/1	4.2	366	R290	141

 $[\]dagger$ Depth does not include 7 mm for rear bumpers.

^{*} Height does not include 584 mm for open lid.