

UK Tel +44 (0) 1709 888 080 • Germany Tel +49 (0) 7622 6883 0 Australia Tel +61 2 9618 9999 • www.truemfg.com





Model:

TUC-72-HC

Undercounter:


Solid Door Refrigerator with Hydrocarbon Refrigerant



TUC-72-HC

- True's undercounter units are designed with enduring quality that protects your long term investment.
- Factory engineered system using environmentally friendly R290 hydro carbon refrigerant maintains temperature of 0.5°C to 3.3°C for the best in food preservation.
- Exterior stainless steel front, top and ends. GalFan coated steel back.
- Interior NSF approved, clear coated aluminum liner. Stainless steel floor with coved corners.
- Adjustable, heavy duty PVC coated shelves.
- Foamed-in-place using a high density, environmentally friendly polyurethane insulation.

PLAN VIEW

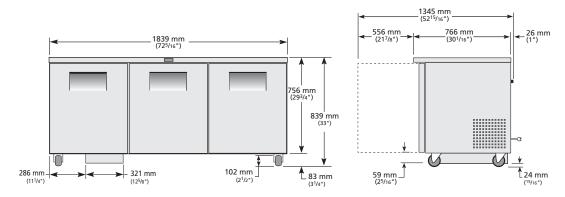

ROUGH-IN DATA

Voltage: 220-240V/50-60Hz

Specifications subject to change without notice. Chart dimensions rounded up to the next whole millimeter (inches rounded up to the next $\frac{1}{2}$ ").

Voltage: 220 210 V/30 00112												
		Doors/		Cabinet Dimensions (mm)			Net Volumes		24 hr/ Energy Consump-		Crated Weight	
Model	Model Type	Drawers	Shelves	W	D†	Н	(litres)	EEC	EEI		tion (kWh)	(kg)
TUC-72-HC	Counter Chilled	3/0	6	1839	766	839	461	В	33,2	2,70	985	184

[†] Depth does not include 26 mm for rear bumpers.

Test Standard: EN16825 - Climate Class 5 (40°C, 40% relative humidity).